

T 2517 EN

Type 41-73 Universal Excess Pressure Valve

Self-operated Pressure Regulators



Application

Pressure regulators for set points from **0.05 to 28 bar** · Nominal sizes **DN 15 to 100** · Pressure rating **PN 16 to 40** · Suitable for **liquids, gases and vapors** up to **350 °C**

The valve **opens** when the **upstream** pressure rises.

Special features

- Low-maintenance proportional regulators requiring no auxiliary energy
- Frictionless plug stem seal with stainless steel bellows
- Control line kit available for tapping the pressure directly at the valve body
- Wide set point range and convenient set point adjustment using a nut
- Exchangeable set point springs and actuator
- Spring-loaded, single-seated valve with upstream and downstream pressure balancing 1) by a stainless steel bellows
- Soft-seated plug for strict shut-off requirements
- Low-noise plug (standard)
- All wetted parts free of non-ferrous metal

Versions

Excess pressure valve for controlling the upstream pressure p_1 to the adjusted set point. The valve opens when the upstream pressure rises.

– Type 41-73 · Standard version

Type 2417 Valve · Valve DN 15 to 100 · Metal-seated plug · Body made of cast iron EN-GJL-250, spheroidal graphite iron EN-GJS-400-18-LT, cast steel 1.0619 or CrNiMo steel 1.4408 · Type 2413 Actuator with EPDM rolling diaphragm

Version with additional features

- **Excess pressure valve with increased safety**
Actuator with leakage line connection and seal or two diaphragms and diaphragm rupture indicator

Special versions

- Control line kit for tapping the pressure directly at the valve body (accessories)



Fig. 1: Type 41-73 Universal Excess Pressure Valve

- With internal parts made of FKM, e.g. for use with mineral oils
- Actuator for remote set point adjustment (autoclave control)
- Bellows actuator for valves DN 15 to 100 · Set point ranges 2 to 6, 5 to 10, 10 to 22 or 20 to 28 bar
- Valve with flow divider ST 1 for particularly low-noise operation with gases and vapors (► T 8081)
- Version entirely of stainless steel
- Stellite®-faced seat and plug for low-wear operation
- Version for industrial gases
- Stainless Cr steel seat and plug with PTFE soft seal (max. 220 °C) or with EPDM soft seal (max. 150 °C)
- Free of oil and grease for high-purity applications
- FDA version ¹⁾

¹⁾ With $K_{VS} \leq 4$: without balancing bellows

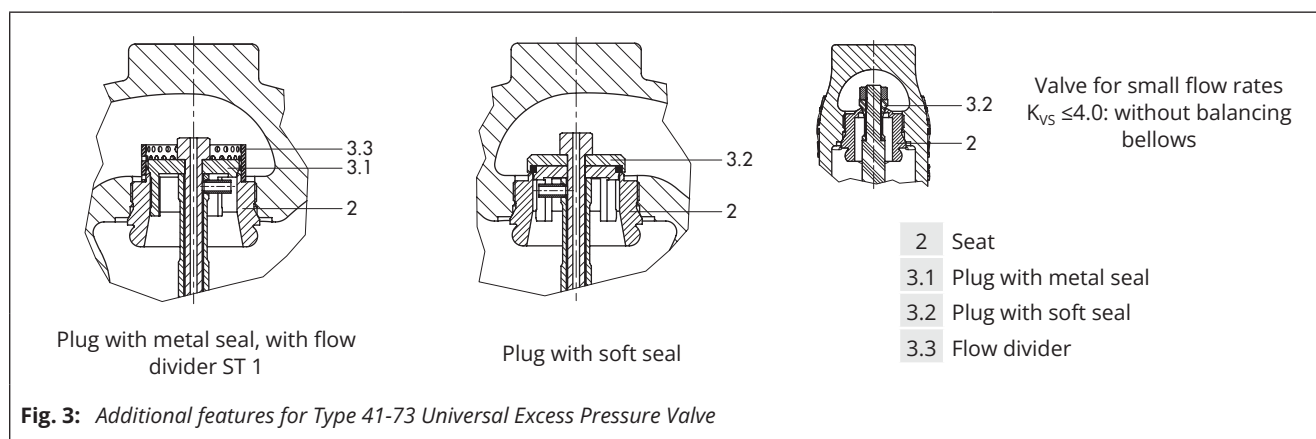


Table 1: Technical data · All pressures in bar (gauge)

Valve	Type 2417		
Pressure rating	PN 16, 25 or 40		
Nominal size	DN 15 to 50	DN 65 to 80	DN 100
Max. perm. differential pressure Δp	16 bar ²⁾ · 25 bar	16 bar ²⁾ · 20 bar	16 bar
Max. permissible temperature ³⁾	See pressure-temperature diagram in ► T 2500		
Valve plug	Metal seal: max. 350 °C · PTFE soft seal: max. 220 °C · EPDM or FKM soft seal: max. 150 °C · NBR soft seal: max. 80 °C		
Leakage class according to IEC 60534-4	Metal seal: leakage rate I (≤ 0.05 % of K_{VS}) Soft seal: leakage rate IV (≤ 0.01 % of K_{VS})		
Conformity	CE		
Diaphragm actuator	Type 2413		
Set point ranges	0.05 to 0.25 bar · 0.1 to 0.6 bar · 0.2 to 1.2 bar · 0.8 to 2.5 bar ¹⁾ · 2 to 5 bar 4.5 to 10 bar · 8 to 16 bar		
Max. permissible temperature ³⁾	Gases 350 °C, however, max. 80 °C at the actuator · Liquids 150 °C, with compensation chamber 350 °C · Steam with compensation chamber 350 °C		
Bellows actuator	Type 2413		
Actuator area	33 cm ²	62 cm ²	
Set point ranges	10 to 22 bar · 20 to 28 bar	2 to 6 bar · 5 to 10 bar	

¹⁾ Version with actuator with two diaphragms: 1 to 2.5 bar ²⁾ For PN 16 only

³⁾ FDA version: Max. permissible temperature 60 °C

Table 2: Materials · Material numbers according to DIN EN

Valve	Type 2417			
Pressure rating	PN 16	PN 25	PN 40	
Max. permissible temperature ³⁾	300 °C	350 °C	350 °C	350 °C
Body	Cast iron EN-GJL-250	Spheroidal graphite iron EN GJS-400-18-LT	Cast steel 1.0619	Stainless steel 1.4408
Seat	CrNi steel			CrNiMo steel
Plug	CrNi steel			CrNiMo steel
Seal for soft-seated plug	PTFE with 15 % glass fiber · EPDM · NBR · FKM			
Guide bushing	CrNi steel			
Balancing bellows and bellows seal	CrNiMo steel			
Actuator	Type 2413			
	Diaphragm actuator		Bellows actuator	
Diaphragm cases	1.0332 ²⁾		-	
Diaphragm	EPDM with fabric reinforcement ³⁾ · FKM, e.g. for mineral oils · NBR		-	
Bellows housing	-		1.0460/1.4301 (stainless steel only)	
Bellows	-		CrNiMo steel	

¹⁾ In corrosion-resistant version (CrNi steel)

²⁾ Standard version; see 'Special versions' for others

³⁾ FDA version: Max. permissible temperature 60 °C

Table 3: Max. perm. pressure at actuator

Set point range · Actuator with rolling diaphragm							Set point range · Bellows actuator			
0.05 to 0.25 bar	0.1 to 0.6 bar	0.2 to 1.2 bar	0.8 to 2.5 bar	2 to 5 bar	4.5 to 10 bar	8 to 16 bar	2 to 6 bar	5 to 10 bar	10 to 22 bar	20 to 28 bar
Max. perm. pressure above the set point adjusted at the actuator										
0.6 bar	0.6 bar	1.3 bar	2.5 bar	5 bar	10 bar	10 bar	6.5 bar	6.5 bar	8 bar	2 bar

Installation

Normally, the valve is installed with the actuator suspended downwards. Install pipelines horizontally with a slight downward slope on both sides of the valve for drainage of the condensate.

- The direction of flow must match the arrow on the valve body.
- Adapt the control line to the conditions on site. The control line is not included in the scope of delivery. A control line kit is available for tapping the pressure directly at the valve body (see ‘Accessories’).

For further details on installation refer to Mounting and Operating Instructions

► EB 2517.




Accessories

Included in the scope of delivery:

- Screw joint with restriction for control line with 6 mm diameter

To be ordered separately:

- **Compression-type fittings** for e.g. 6, 8 or 10 mm pipe
- **Control line kit** (optionally with or without compensation chamber) for direct attachment to the valve and actuator (pressure tapped directly at the valve body, for set points ≥ 0.8 bar).



Ordering text

Type 41-73 Universal Excess Pressure Valve

Additional features ...

DN ...

Body material ...

PN ...

K_{VS} coefficient ...

Set point range ... bar

Optionally, accessories ... (► T 2595)

Optionally, special version ...

Dimensional drawings

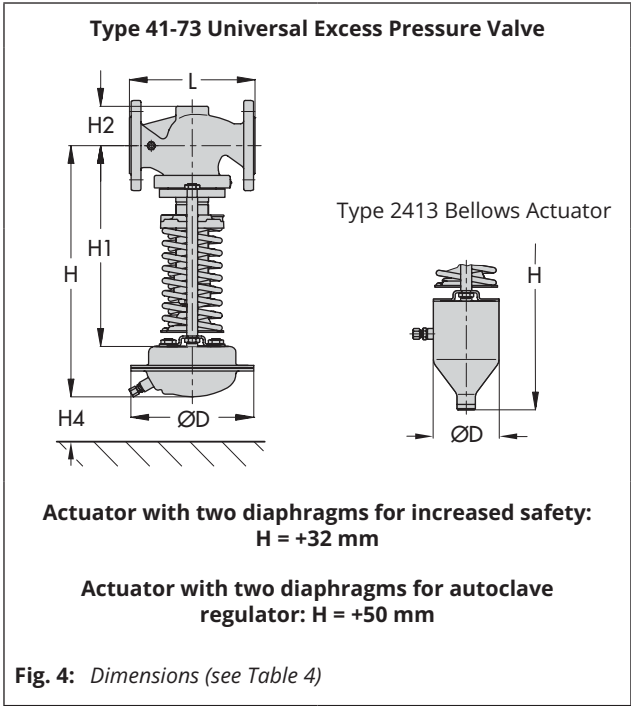


Table 4: Weights · Compensation chambers (standard version)

Order no.	Designation	Weight, approx.
1190-8788	Compensation chamber 0.7 l · Steel	1.6 kg
1190-8789	Compensation chamber 1.5 l · Steel	2.6 kg
1190-8790	Compensation chamber 2.4 l · Steel	3.7 kg

- **Compensation chamber** for condensation and to protect the operating diaphragm against extreme temperatures. A compensation chamber is required for liquids above 150 °C as well as for steam.

For further details on accessories refer to ► T 2595.

Table 5: Dimensions in mm and weights in kg

Excess pressure valve		Type 41-73									
Nominal size		DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	
Length L		130	150	160	180	200	230	290	310	350	
Height H1		335			390			517		540	
Height H2	Cast steel	44			72			98		118	
	Forged steel	53	-	70	-	92	98	-	128	-	
Height H4		100									
Standard version with Type 2413 Actuator with rolling diaphragm											
Set point ranges	0.05 to 0.25 bar	Height H ^{3) 4)}	445			500			627	650	
		Actuator	ØD = 380 mm, A = 640 cm ²								
		Valve spring force F	1750 N								
	0.1 to 0.6 bar	Height H ^{3) 4)}	445			500			627	650	
		Actuator	ØD = 380 mm, A = 640 cm ²								
		Valve spring force F	4400 N								
	0.2 to 1.2 bar	Height H ^{3) 4)}	430			480			607	635	
		Actuator	ØD = 285 mm, A = 320 cm ²								
		Valve spring force F	4400 N								
	0.8 to 2.5 bar ²⁾	Height H ^{3) 4)}	430			485			612	635	
		Actuator	ØD = 225 mm, A = 160 cm ²								
		Valve spring force F	4400 N								
	2 to 5 bar	Height H ^{3) 4)}	410			465			592	600	
		Actuator	ØD = 170 mm, A = 80 cm ²								
		Valve spring force F	4400 N								
	4.5 to 10 bar	Height H ^{3) 4)}	410			465			592	615	
		Actuator	ØD = 170 mm, A = 40 cm ²								
		Valve spring force F	4400 N								
	8 to 16 bar	Height H ^{3) 4)}	410			465			592	615	
		Actuator	ØD = 170 mm, A = 40 cm ²								
		Valve spring force F	8000 N								
Weight for version with rolling diaphragm											
Set pt range	0.05 to 0.6 bar	Weight, based on cast iron ¹⁾ , approx. kg	24.8	25.9	32.5	34.7	38.5	56.1	63.8	73.7	
	0.2 to 2.5 bar		20.6	22.8	28.9	31.1	34.9	52.5	60.2	70.1	
	2 to 16 bar		13.2	14.3	20.4	23.1	26.4	44.0	51.7	61.6	
Version with Type 2413 Bellows Actuator											
Set point ranges	2 to 6 bar	Height H	550			605			732	755	
		Actuator	ØD = 120 mm, A = 62 cm ²								
		Valve spring force F	4400 N								
	5 to 10 bar	Height H	550			605			732	755	
		Actuator	ØD = 120 mm, A = 62 cm ²								
		Valve spring force F	8000 N								
	10 to 22 bar	Height H	535			590			717	740	
		Actuator	ØD = 90 mm, A = 33 cm ²								
		Valve spring force F	8000 N								
	20 to 28 bar	Height H	535			590			717	740	
		Actuator	ØD = 90 mm, A = 33 cm ²								
		Valve spring force F	8000 N								
Weight for version with bellows actuator											
A = 33 cm ²	Weight, based on cast iron ¹⁾ , approx. kg	18.2	19.3	19.8	25.9	28.1	31.9	48.4	61.6	71.5	
A = 62 cm ²		22.6	23.7	24.2	30.3	32.5	36.3	60.5	68.2	78.1	

¹⁾ +10 % for all other materials²⁾ Actuator with two diaphragms: 1 to 2.5 bar³⁾ Actuator with two diaphragms for increased safety: H = +32 mm⁴⁾ Actuator with two diaphragms for autoclave regulator: H = +50 mm

Table 6: K_{VS} coefficients and x_{FZ} values · Terms for noise level calculation according to VDMA 24422, edition 1.89

Nominal size	$K_{VS}^{1)}$ Standard version	x_{FZ}	$K_{VS}^{1)}$ Special version	x_{FZ}	$K_{VS-ST 1}$ With flow divider
DN 15			1	0.6	
	4	0.5			3
DN 20			1	0.6	
			4	0.5	
	6.3	0.45			5
DN 25			1	0.6	
	8	0.4	4	0.5	6
DN 32			4 · 8	0.5 · 0.4	
	16	0.4			12
DN 40			4 · 8	0.5 · 0.45	
	20	0.4			15
DN 50			4 · 8	0.5 · 0.4	
	32	0.4			25
DN 65			32 ²⁾	0.4	
	50	0.4			38
DN 80			32 ²⁾	0.4	
	80	0.35			42
DN 100			80	0.4	
	125	0.35			66

1) $K_{VS} \leq 4$: valve without balancing bellows

2) Max. permissible Δp : 25 bar

Valve-specific correction terms

- ΔL_G · For gases and vapors: values according to Fig. 5

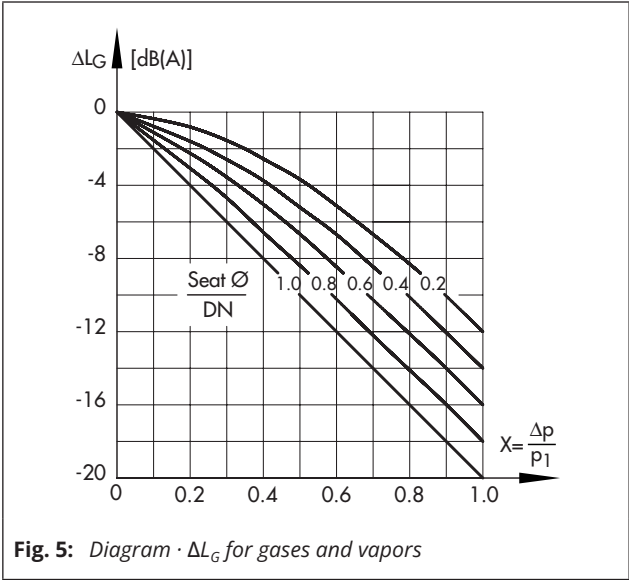


Fig. 5: Diagram · ΔL_G for gases and vapors

- ΔL_F · For liquids:

$$\Delta L_F = -10 \cdot (x_F - x_{FZ}) \cdot y$$

$$\text{with } x_F = \frac{\Delta p}{p_1 - p_v} \text{ and } y = \frac{K_V}{K_{VS}}$$

Terms for control valve sizing according to IEC 60534, Parts 2-1 and 2-2:

- $F_L = 0.95$; $x_T = 0.75$
- x_{FZ} · Acoustical valve coefficient
- $K_{VS-ST 1}$ · When a flow divider ST 1 is installed as a noise-reducing component

Flow characteristic differences between valves with and valves without flow dividers do not occur until the valve has passed through approx. 80 % of its travel range.